


Delta bladder expansion tanks are designed to absorb pressure created by expanding fluid in hydronic & cooling systems. When properly installed, the pressure control provided by these tanks will help prevent blowing of relief valves and BTU loss. The removable bladders are suitable for hot water applications and intended for potable water.

ASME CODE SEC. VIII DIV. 1
NATIONAL BOARD REGISTERED
CARBON STEEL
PRIMER EXTERIOR
125 PSI DESIGN
STANDARD BLADDER MAX 240°F
(OTHER DESIGN PRESSURES AND
BLADDERS AVAILABLE)
PRE-CHARGED TO 12 PSI

*CUSTOM SIZES AVAILABLE

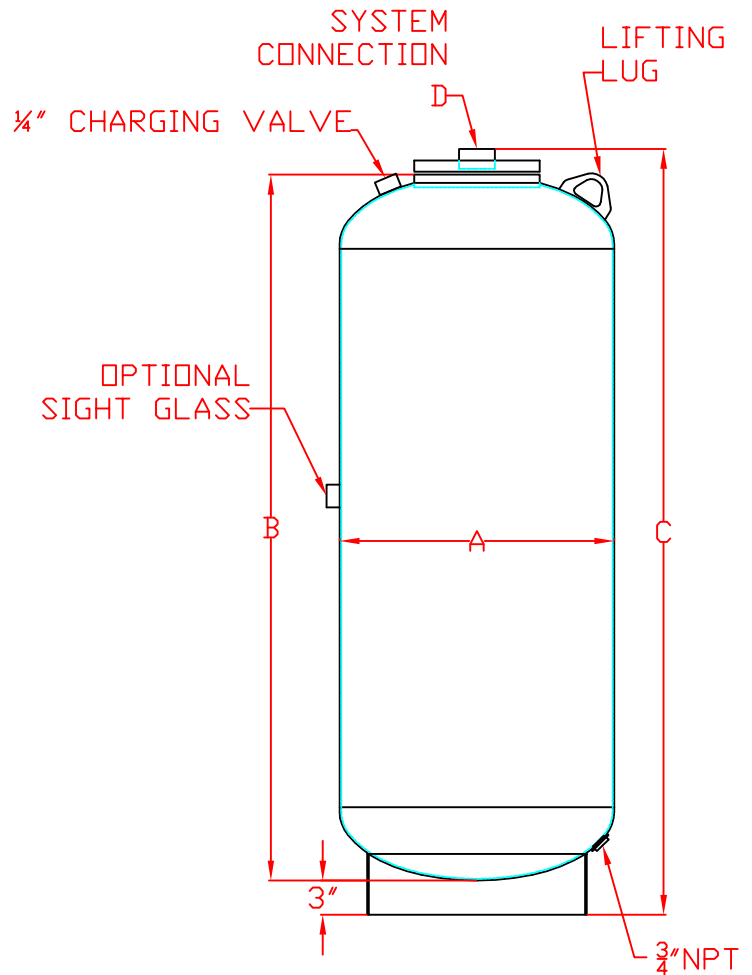

ALL DIMENSIONS ARE IN INCHES

MODEL	VOLUME (GAL)	A	B	C	D
DET-158-T-PW	158	30	58	61	1 1/2
DET-211-T-PW	211	30	76	79	1 1/2
DET-264-T-PW	264	36	67	70	2
DET-317-T-PW	317	36	78 1/2	81 1/2	2
DET-370-T-PW	370	36	91	94	2
DET-422-T-PW	422	48	63 1/2	66 1/2	2
DET-528-T-PW	528	48	77 1/4	80 1/4	2
DET-660-T-PW	660	48	94	97	2 1/2

Dimensions are subject to change.
Weights are approximate.