


Delta air receivers are used for the storage of compressed air. Commonly found in every air compressor, these tanks safely store air in pneumatic systems.

ASME CODE SEC. VIII DIV. 1
NATIONAL BOARD REGISTERED
CARBON STEEL
PRIMER EXTERIOR
150 PSI DESIGN
(OTHER DESIGN PRESSURES AVAILABLE)

*CUSTOM SIZES AVAILABLE
*OTHER SADDLE SUPPORTS AVAILABLE

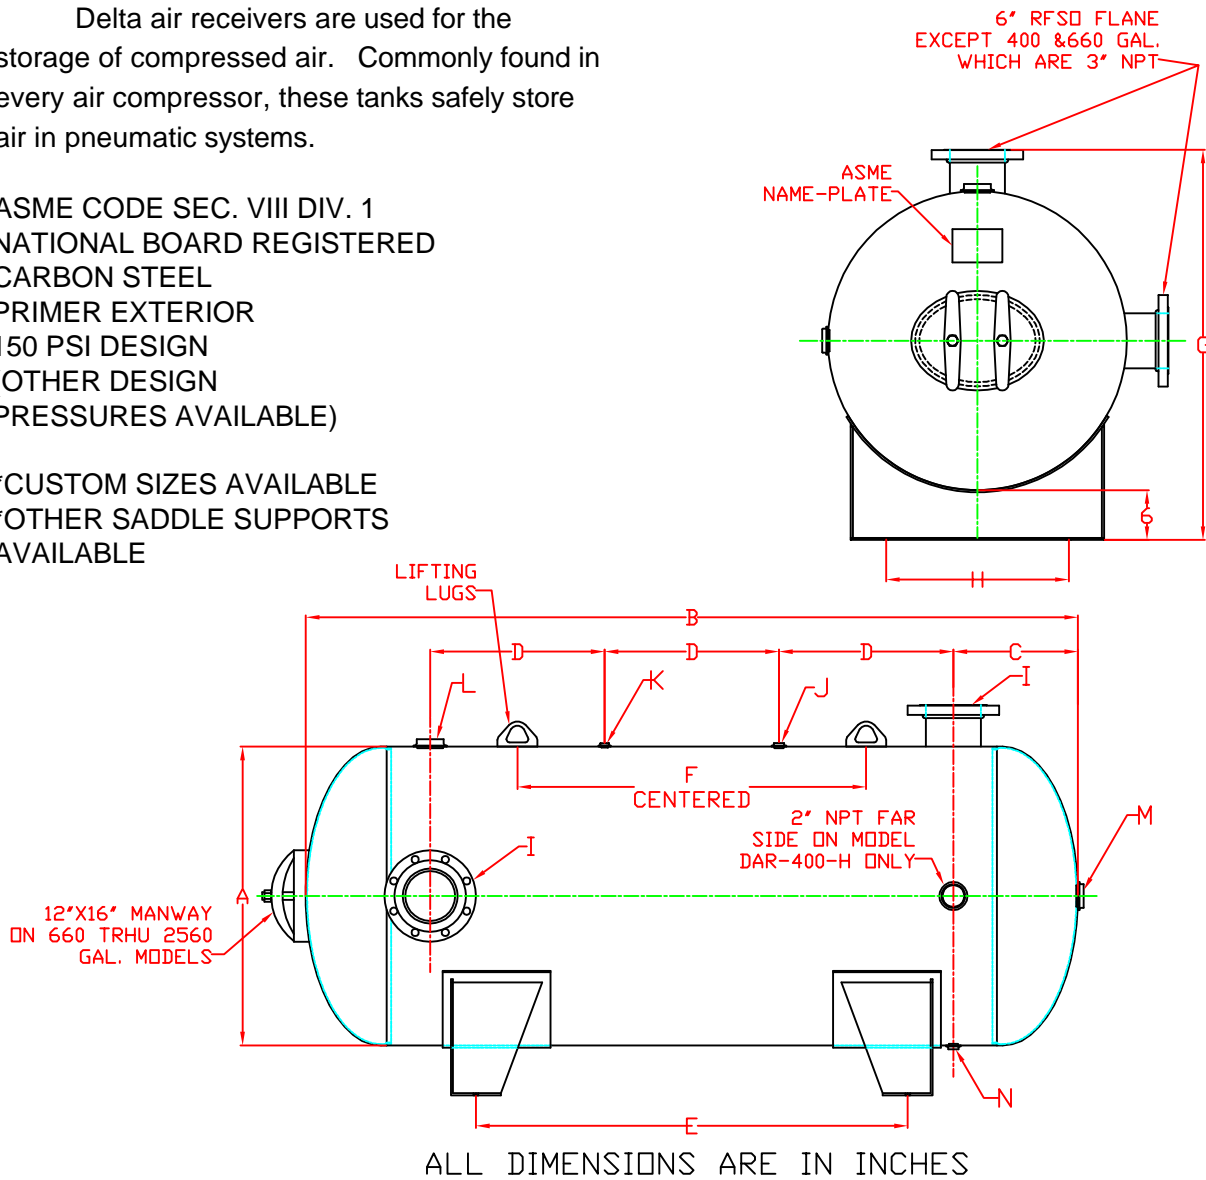

MODEL	VOLUME (GAL)	A	B	C	D	E	F	G	H	I	J	K	L	M	N
DAR-400-H	400	36	93	15	21	52	52	42	33	3" NPT.	1/2	1/4	2 1/2	2	3/4
DAR-660-H	660	42	117	18	27	70	57	48	39	3" NPT.	1	1/4	3	2	3/4
DAR-1060-H	1060	48	144	24	32	84	60	60	45	6" RFSO	1	1/4	3	2	3/4
DAR-1550-H	1550	54	166	26	38	98	76	66	51	6" RFSO	1	1/4	3	2	3/4
DAR-2200-H	2200	60	190	29	44	116	98	72	57	6" RFSO	1	1/4	3	2	3/4
DAR-2560-H	2560	60	220	29	54	131	118	72	57	6" RFSO	1	1/4	3	2	3/4

Dimensions are subject to change.
Weights are approximate.