


Delta's fabricated flow diverter is designed to replace a long radius elbow, strainer ('F' Dimension), and extended entry pipe on the suction side of a pump in order to consolidate space and reduce installation expenses.

ASME CODE SEC. VIII DIV. 1  
 NATIONAL BOARD REGISTERED  
 CARBON STEEL  
 PRIMER EXTERIOR  
 125 PSI DESIGN  
 (OTHER DESIGN PRESSURES AVAILABLE)

\*CUSTOM SIZES AVAILABLE

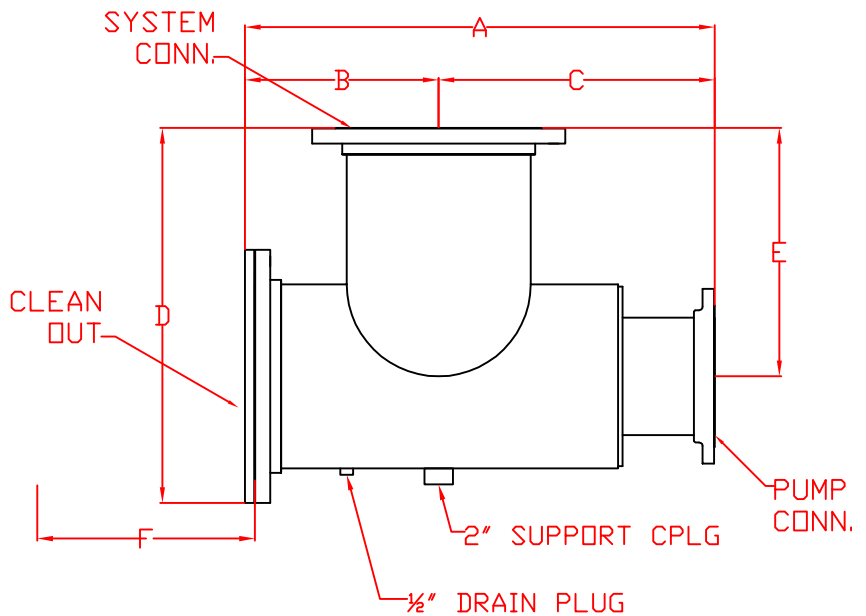

ALL DIMENSIONS ARE IN INCHES

MODEL	PUMP CONN.	SYSTEM CONN.	A	B	C	D	E	F
DFD-1014	10"	14"	19 7/8	29 5/8	12 5/8	29 1/2	17	17
DFD-1214	12"	14"	19 7/8	29 5/8	12 5/8	29 1/2	17	17
DFD-1414	14"	14"	21 1/2	31 3/4	13 3/4	31 3/4	18	18
DFD-1016	10"	16"	21 1/2	31 3/4	13 3/4	31 3/4	18	18
DFD-1216	12"	16"	21 1/2	31 3/4	13 3/4	31 3/4	18	18
DFD-1416	14"	16"	21 1/2	31 3/4	13 3/4	31 3/4	18	18
DFD-1218	12"	18"	33 3/4	51 1/8	21 1/8	43	30	27
DFD-1418	14"	18"	33 3/4	51 1/8	21 1/8	43	30	27
DFD-1220	12"	20"	33 3/4	51 1/8	21 1/8	43	30	27
DFD-1420	14"	20"	33 3/4	51 1/8	21 1/8	43	30	27
DFD-1620	16"	20"	33 3/4	51 1/8	21 1/8	43	30	27
DFD-2020	20"	20"	33 3/4	51 1/8	21 1/8	43	30	27
DFD-1424	14"	24"	33 11/16	58 7/8	22 7/16	48 1/8	36 7/16	28 3/4
DFD-1624	16"	24"	33 11/16	58 7/8	22 7/16	48 1/8	36 7/16	28 3/4
DFD-2024	20"	24"	33 11/16	58 7/8	22 7/16	48 1/8	36 7/16	28 3/4

Dimensions are subject to change.  
 Shipping weights are approximate.